



Forestry mulcher for standard tractors or crawler tractor between 40 and 100 HP.

Suitable for the cleaning of brushwood, which favors the growth of trees, the reclamation of land, the maintenance and restoration of banks, the maintenance of areas under power lines, forestry roads, fire-blocking lines.


It incorporates rotor POLSER+ of 420 mm of diameter.

## CHARACTERISTICS

- Steel-plate chassis, thickness 8 mm.
- Rotor POLSER + of 420 mm. of diameter.
- Gearbox SERRAT.
- 3 XPC side belt transmission.
- Swinging hammers or fixed tooth carbide.
- Supports of bearing rotor in steel.
- Oscillating bearings of double row of rollers.
- Front safety chains.
- PTO 540 rpm.
- Steel counter hammers.
- Skid shoes adjustable.
- Hydraulic rear hood.
- Model built under EC Normative.
- Safety indicators visible to personnel.



**Swinging hammers**  
**Hydraulic rear hood**  
**Pushing frame (option)**

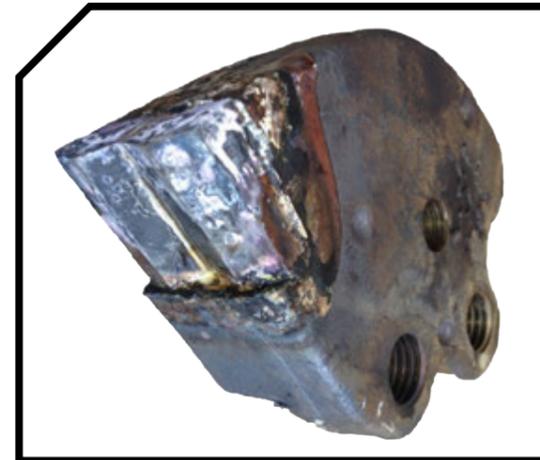


MODEL	mm	KW-HP	[Icon]	[Icon]	[Icon]	[Icon]	Nº BELTS TYPE	[Diagram]							
								A	A	B	B	C	C		
								mm	in	mm	in	mm	in	mm	in
T-1200	1200	30 - 40 75 - 100	12	32	16	631	3 XPC	1420	56"	923	36"	886	35"	540	
T-1400	1400	30 - 40 75 - 100	12	36	18	675	3 XPC	1620	64"	923	36"	886	35"	540	
T-1600	1600	30 - 40 75 - 100	15	38	22	738	3 XPC	1820	72"	923	36"	886	35"	540	
T-1800	1800	30 - 40 75 - 100	18	48	24	795	3 XPC	2020	80"	923	36"	886	35"	540	

## OPTIONS



• Freewheel on sleeve

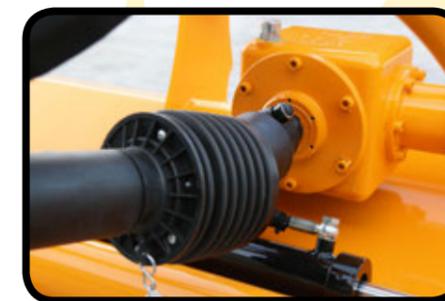

• Freewheel on transmission



• Hydraulic or mechanic pushing frame

